


The Cutting Edge

The Reference Series

Truly Reference Grade High-End Tube Amplifiers

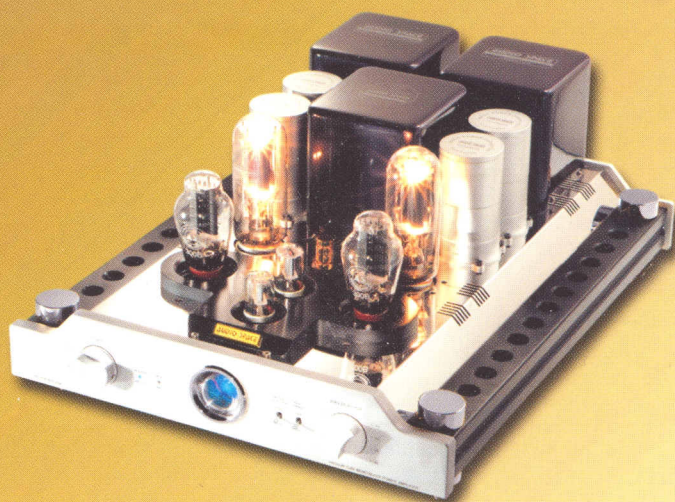

Reference 1 - Technology of the Year -- MJ Magazine 2004, Japan

An original masterpiece of high-power Class-A Triode tube monoblock power amplifier

Description: Power Monoblock, Class-A Triode
Output Power: 75W/ch
Output Impedance: 4, 8, 16 ohm
Frequency Response: 20 - 20K Hz (+/- 1dB)
Input Sensitivity: 600mV
S/N Ratio: >80dB (hum noise < 1mV)
Input Mode: RCA or XLR (true-balance)
Tube Complement: 1x6SL7, 1x6SN7, 2x300B, 2x845
Dimensions: 26"x20"x11" (DxWxH)
Weight: 121lbs

Reference 2 - Golden Ear Award

-- The Absolute Sound, 2007



World's First 300B-based Truly Balanced Pre-amp with Tuber MC/MM Phonostage

Description: True-Balance Pre-amp with MC/MM Support
Frequency Response: 20-100K Hz (+/- 1dB)
Output Level: 2-20 V P-P Max.
T.H.D.: < 0.2% 20-20K Hz (reference out)
Input Mode: RCA/XLR
Output Mode: RCA/XLR
S/N Ratio: >86dB (line), >50dB (mc), >65dB (mm)
Input Sensitivity: 150mV (line), 0.3-1mV (mc), 3-10mV (mm)
Input Impedance: 68K ohm (line), 3-100 ohm (mc), 47K ohm (mm)
Tube Complement: 4x300B, 2x12AX7, 2x6922, 4x6SL7
Dimensions: 17"x19"x9" (WxDxH)
Weight: 46lbs



AUDIO SPACE

Audio Space Acoustic Lab . www.audiospace.com.hk

US Distributor: GINI Systems
www.gini.com . info@gini.com . (650)210-8663

The Cutting Edge



Reference 3.1 (KT88)

This latest true reference grade integrated amp delivers stunning dynamics and soundstage in one complete package that cannot be beat.

Description: Class-A (PP) Integrated/Power Amplifier with MM Phonostage

Output Power: 24W/ch (Triode), 48W/ch (Ultralinear)

Output Impedance: 4, 8, 16 ohms

Input Impedance: > 56K ohm (RCA/Direct In)
47K ohm (MM Phono In)

Frequency Response: 20-30K Hz +/-1dB

T.H.D.: < 1% 20-20K Hz (reference output)

S/N Ratio: > 80dB (hum noise < 3mV)

Input Sensitivity: > 200mV (line), 3-5mV (mm phono)

Tube Complement: 4xKT88, 2x6SN7, 4x12AX7

Dimensions: 19"x16"x9" (DxWxH)

Weight: 65 lbs

The Reference Series



Reference 3.1 (300B)

This latest true reference grade integrated amp delivers the sweetest music with pinpoint imaging in one complete package that is second to none.

Description: Class-A Triode (PP) Integrated/Power Amplifier with MM Phonostage

Output Power: 21W/ch

Output Impedance: 4, 8, 16 ohms

Input Impedance: > 56K ohm (RCA/Direct In)
47K ohm (MM Phono In)

Frequency Response: 20-30K Hz +/-1dB

T.H.D.: < 1% 20-20K Hz (reference output)

S/N Ratio: > 80dB (hum noise < 3mV)

Input Sensitivity: > 200mV (line), 3-5mV (mm phono)

Tube Complement: 4x300B, 2x6SN7, 4x12AX7

Dimensions: 19"x16"x9" (DxWxH)

Weight: 65 lbs

Reference 3 (845 & 805, not interchangeable)

From the same brilliant minds who created the 300B-845 & 300B-805 models, comes the very latest interpretation, capturing the magic of 300B and 845/805 Single-Ended Triode amplification.

Description: Class-A Single-Ended Triode Monoblock Power Amplifier

Output Power: 26W/ch (845)

50W/ch (805)

Output Impedance: 4, 8, 16 ohms

Input Impedance: 60K ohm (RCA/XLR)

Frequency Response: 20-20K Hz +/-3dB

T.H.D.: < 1% 20-20K Hz (reference output)


S/N Ratio: > 87dB (hum noise < 1mV)

Input Sensitivity: 300-600mV

Tube Complement: 1x300B, 1x845/805, 1x6SN7, 1x6SL7

Dimensions: 21"x15"x10" (DxWxH)

Weight: 72 lbs

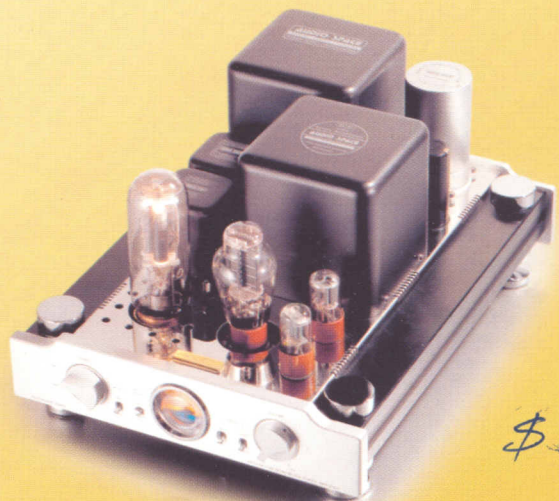

AUDIO SPACE

Audio Space Acoustic Lab . www.audiospace.com.hk